


### ON-SITE or IN-SHOP WORK:

- Mufflers, retorts, cooling chambers, and sheet metal
- Heavy equipment repair and painting
- Shearing and forming – 1/2" x 144" capacity
- Truck beds and log truck bunks
- Sand blasting
- CNC plasma cutting – up to 12" thick
- Fuel tanks to size
- Custom crane installation.
- Custom made: fire escapes, railing steps, cat walks, ladders, tanks, hoppers, guards, road gates.
- Ornamental iron – Can be made to your size specifications. Available in aluminum, stainless, brass, and copper. If you have a picture, chances are we can create it. We also have many patterns to chose from.

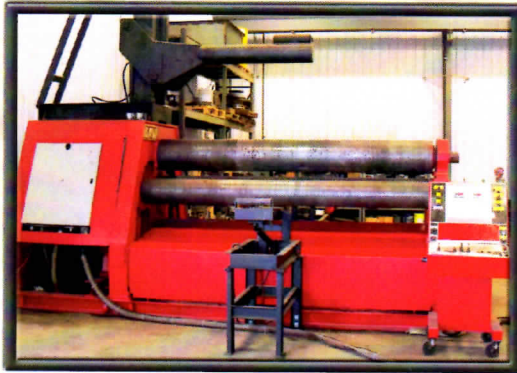


### DAVI Plate Roller

120" x 1" Capacity

When high accuracy is required while rolling large and heavy components, Dinsmore Welding is equipped and experienced.

DAVI MCB 3037		A 36 – Max Yield 37,000 psi – max. UTS 60,000 psi				
ROLLING						
Top Roll Dia. 14.5666"	Shell Inside Diameter (Inches)					
	1.1 top roll Ø	1.5 top roll Ø	3 top roll Ø	5 top roll Ø	10 top roll Ø	
Plate Width (ft)	16"	22"	43"	73"	145"	
1.5	1.191	1.352	1.647	1.754	1.808	
2	1.058	1.191	1.459	1.567	1.62	
2.5	0.977	1.111	1.352	1.459	1.513	
3	0.924	1.031	1.272	1.352	1.406	
3.4	0.87	0.977	1.218	1.299	1.352	
3.9	0.816	0.95	1.165	1.245	1.299	
4.4	0.79	0.897	1.111	1.191	1.245	
4.9	0.763	0.87	1.084	1.165	1.218	
5.4	0.763	0.843	1.058	1.138	1.165	
5.9	0.736	0.843	1.031	1.111	1.138	
6.4	0.709	0.816	1.004	1.084	1.111	
6.9	0.709	0.79	0.977	1.058	1.084	
7.4	0.682	0.79	0.95	1.031	1.084	
7.9	0.682	0.763	0.95	1.031	1.058	
8.4	0.682	0.763	0.95	1.004	1.058	
8.9	0.656	0.763	0.924	1.004	1.058	
9.4	0.656	0.763	0.924	1.004	1.058	
10	0.656	0.763	0.924	1.004	1.031	
Plate Thickness (inches)						

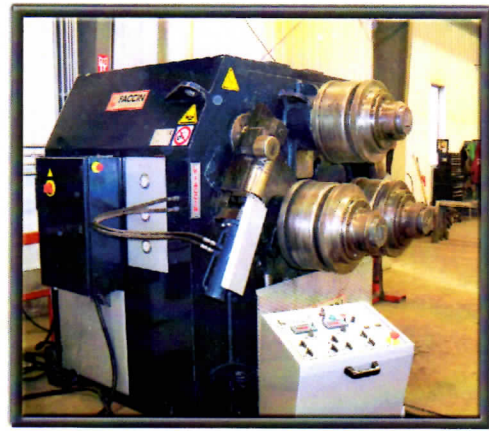

### Faccin Bar Stock Bender

6" x 6" x 5/8" Capacity

Specs:	Maximum Diameter	Minimum Size
Flat Bar (easy way)	10" x 1-5/8"	50"
Flat Bar (hard way)	6-1/2" x 1-1/2"	55"
Round Bar	5"	60"
Square Bar	4-1/2"	64"
Angle (leg out)	6" x 5/8"	60"
Angle (leg in)	6" x 1/2"	70"
Channel (leg out)	C12 x 30#	65"
Channel (leg in)	C12 x 30#	75"
Channel (leg down)	C6 x 13#	340"
Beam (easy way)	I12 x 50#	65"
Beam (hard way)	W6 x 16#	200"
T Bar (leg out)	6" x 5/8"	75"
T Bar (leg in)	6" x 5/8"	110"
T Bar (leg down)	6" x 5/8"	60"
Pipe	6"	90"



### Pro Star Plasma Cutter

10' x 24' x 2-1/2" Capacity

